




Utilities Board of Oneonta, Alabama

Highway 75 Sanitary Sewer Replacement

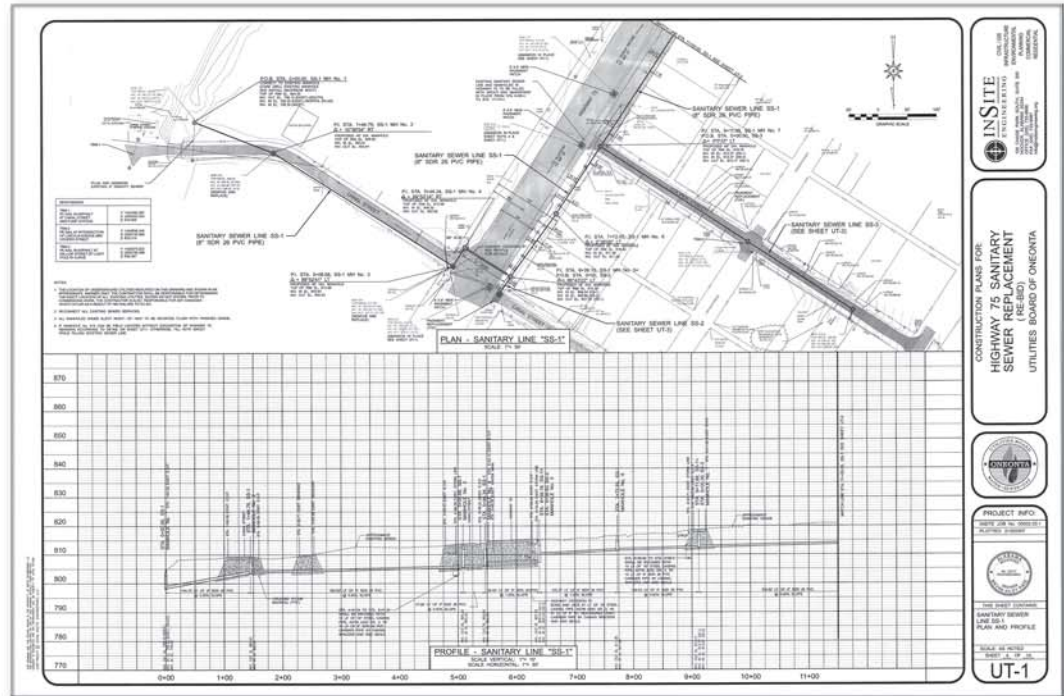

Planning, design, construction administration, and resident inspection of a gravity sanitary sewer replacement to serve existing customers and reduce infiltration and inflow in the City of Oneonta, Alabama, including:

- Approximately 3,000 linear feet of 8" gravity sewer main
- Approximately 16 new precast concrete manholes
- Approximately 25 sewer service re-connections
- Pump run times at the adjacent lift station were significantly reduced as a result of I/I elimination during this project.

Approximate Project Cost: \$450,000